


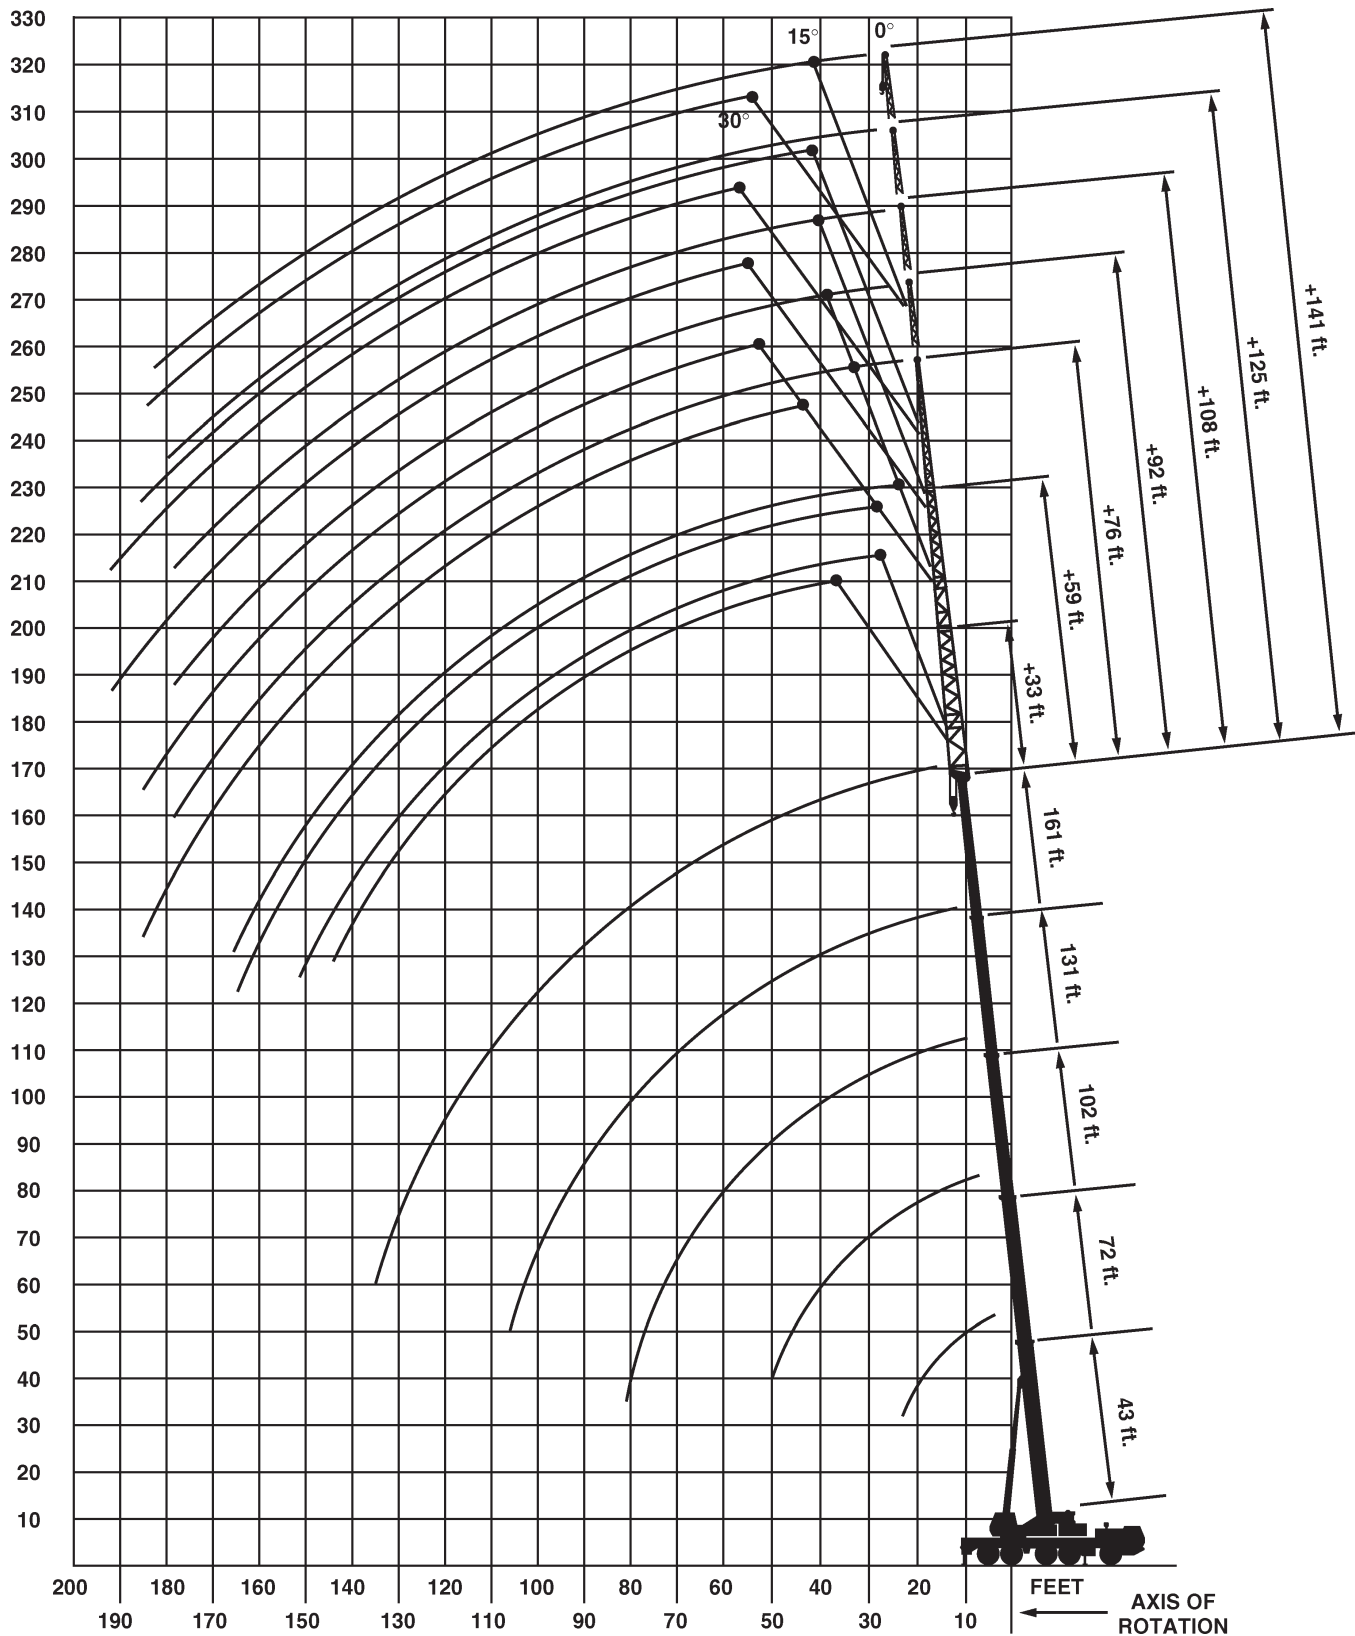

				85
43-161 ft	26'10" x 28'2"	99,200 lbs	360°	85%

ft	43*	43	57	72	87	102	131	146	161	ft
10	350	268	155	194	155	110				10
15	278	232	155	190	155	110	80			15
20	226	189	144	164	145	110	80	61	46	20
25	185	159	124	141	127	110	80	61	46	25
30	137	136	108	123	111	100	80	61	46	30
35			96	108	97	89	76	59	46	35
40			85	96	86	78	70	55	46	40
45			77	81	77	70	64	52	46	45
50				71	68	63	58	49	46	50
55				62	58	57	53	46	43.2	55
60					50	51	49	43.6	40.4	60
65					42.8	44	45	41.4	37.8	65
70					37	38.2	41.4	39.2	35.8	70
75					32.2	33.2	37.8	36.8	33.8	75
80						29	33.6	34.6	31.6	80
85						25.4	30	30.8	30	85
90						21	26.8	27.6	28.4	90
95							23.8	24.8	26.4	95
100							21.4	22.2	24	100
105							19.6	20	21.6	105
110							18.6	18	19.6	110
115							17.6	16.2	17.8	115
120							16.8	14.4	16	120
125								13	14.6	125
130								11.6	13.2	130
135									11.8	135
140									10.6	140
145									9.6	145

* over rear with reduced outrigger base

BURT crane & rigging



175 t

Krupp KMK 5175 (#109)

All Terrain Crane



85

43-161 ft

26'10" x 28'2"

66,100 lbs

360°

85%

ft	43*	43	57	72	87	102	131	146	161	ft
10	337	268	155	194	155	110				10
15	276	228	155	190	155	110	80			15
20	220	186	144	164	145	110	80	61	46	20
25	148	157	124	141	127	110	80	61	46	25
30	103	132	108	123	111	100	80	61	46	30
35			96	96	97	89	76	59	46	35
40			81	81	76	78	70	55	46	40
45			67	67	62	63	64	52	46	45
50				56	51	52	57	49	46	50
55				47	42.4	43.6	49	46	43.2	55
60					35.4	36.6	41.6	42.6	40.4	60
65					29.8	31	35.8	36.8	37.8	65
70					25.2	26.8	31	32	33.8	70
75					21.2	25.2	28.6	28	29.6	75
80						23.6	26.4	24.4	26.2	80
85						22.2	24.8	21.4	23.2	85
90						21	23.4	18.8	20.4	90
95							21.4	16.4	18.2	95
100							19.2	14.4	16	100
105							17.4	12.6	14.2	105
110							15.6	11	12.6	110
115							14.2	9.4	11	115
120							12.8	8	9.6	120
125								6.8	8.4	125
130								5.6	7.2	130
135									6.2	135
140									5.2	140
145									4.4	145

* over rear with reduced outrigger base

					85
161 ft	33/59 ft	26'10" x 28'2"	99,200 lbs	360°	85%

ft	0°	33 15°	30°	0°	59 15°	30°	ft
20	26.6						20
25	26.6						25
30	26.6			17			30
35	26.6	26.6		17			35
40	26.6	26.6	26.6	17			40
45	26.6	26.4	26.6	17	18		45
50	26.4	26.2	25.8	17	18		50
55	26	25.8	24.8	17	18		55
60	25.8	25.4	23.8	17	18	17.6	60
65	25.4	24.4	23	17	18	17	65
70	25	23.6	22.2	17	17.8	16.2	70
75	24.4	22.6	21.4	17	17.2	15.6	75
80	23.6	21.8	20.6	17	16.6	14.8	80
85	22.6	21	20	17	15.8	14.2	85
90	21.6	20.2	19.2	17	15.2	13.8	90
95	20.6	19.4	18.6	16.4	14.4	13.4	95
100	19.6	18.8	18	15.6	13.8	13	100
105	18.8	18.2	17.6	15	13.4	12.6	105
110	18	17.4	17	14.2	12.8	12.2	110
115	17.2	16.8	16.6	13.4	12.4	11.8	115
120	16.4	16	15.8	13	12	11.4	120
125	15.4	15.2	15.2	12.6	11.8	11.2	125
130	14.2	14.4	14.4	12.2	11.4	10.8	130
135	12.8	13.4	13.8	11.8	11	10.6	135
140	11.6	12.2	12.4	11.4	10.8	10.4	140
145	10.4	11	11.2	11	10.4	10.2	145
150	9.4	9.8	10	10.6	10.2	9.8	150
155	8.4	8.8	9	9.8	9.8	9.6	155
160	7.6	7.8	8	9	9.6	9.4	160
165	6.8	7	7	8.2	8.8	9.2	165
170	6	6.2	6.2	7.4	8	8.4	170
175	5.2	5.4	5.4	6.6	7.2	7.6	175
180				5.8	6.4	6.8	180
185				5.2	5.6	6	185
190				4.6	5	5.2	190
195				4	4.4	4.4	195
200				3.4	3.6	3.6	200

BURT crane & rigging



175 t

Krupp KMK 5175 (#109)

All Terrain Crane



161 ft



33/59 ft



26'10" x 28'2"



66,100 lbs



360°

85

85%

ft	0°	33 15°	30°	0°	59 15°	30°	ft
20	26.6						20
25	26.6						25
30	26.6			17			30
35	26.6	26.6		17			35
40	26.6	26.6	26.6	17			40
45	26.6	26.4	26.6	17	18		45
50	26.4	26.2	25.8	17	18		50
55	26	25.8	24.8	17	18		55
60	25.8	25.4	23.8	17	18	17.6	60
65	25.4	24.4	23	17	18	17	65
70	25	23.6	22.2	17	17.8	16.2	70
75	24.4	22.6	21.4	17	17.2	15.6	75
80	23.6	21.8	20.6	17	16.6	14.8	80
85	22.6	21	20	17	15.8	14.2	85
90	21.6	20.2	19.2	17	15.2	13.8	90
95	19.4	19.4	18.6	16.4	14.4	13.4	95
100	17.2	18.2	18	15.6	13.8	13	100
105	15.4	16.2	17	15	13.4	12.6	105
110	13.6	14.4	15.2	14.2	12.8	12.2	110
115	12	12.8	13.4	13.4	12.4	11.8	115
120	10.6	11.4	12	12.2	12	11.4	120
125	9.4	10	10.6	10.8	11.8	11.2	125
130	8.2	8.8	9.4	9.6	11	10.8	130
135	7.2	7.8	8.2	8.6	9.8	10.6	135
140	6.2	6.6	7	7.6	8.8	9.6	140
145	5.2	5.8	6	6.6	7.8	8.6	145
150	4.4	4.8	5	5.8	6.8	7.6	150
155	3.6	4	4.2	5	6	6.6	155
160	2.8	3.2	3.4	4.2	5	5.6	160
165	2.2	2.4	2.6	3.6	4.4	4.8	165
170				3	3.6	4	170
175				2.4			175

					85
131 ft	76-141 ft	26'10" x 28'2"	99,200 lbs	360°	85%

ft	0°	76 15°	30°	0°	92 15°	30°	0°	108 15°	30°	0°	125 15°	30°	0°	141 15°	30°	ft
20	12.8			11.2												20
25	12.8			11.2												25
30	12.8			11.2			9.4									30
35	12.8			11.2			9.4			7.6			5.6			35
40	12.8			11.2			9.4			7.6			5.6			40
45	12.8	12.4		11.2			9.4			7.6			5.6			45
50	12.8	12.2		11.2	10.8		9.4	9		7.6			5.6			50
55	12.8	12		11.2	10.4		9.4	8.6		7.6	7.2		5.6			55
60	12.8	11.6	10.4	11.2	9.8		9.2	8.2		7.6	7.2		5.6	6		60
65	12.8	11.4	10.2	10.6	9.4		8.8	7.8		7.6	7.2		5.6	6		65
70	12.2	11.2	10	10	9.2	8.8	8.4	7.6	7.4	7.6	7.2		5.6	6		70
75	11.8	10.8	9.8	9.6	8.8	8.6	8	7.4	7.2	7.6	7.2		5.6	6		75
80	11.2	10.6	9.6	9.2	8.6	8.4	7.6	7	7	7.4	7	6.8	5.6	6	6.4	80
85	10.8	10.2	9.4	8.8	8.4	8.2	7.4	6.8	6.8	7	6.8	6.6	5.6	6	6.4	85
90	10.6	10	9.2	8.6	8.2	8.2	7.2	6.8	6.6	7	6.6	6.4	5.6	6	6.4	90
95	10.2	9.8	9	8.4	8	8	6.8	6.6	6.6	6.8	6.6	6.2	5.6	6	6.2	95
100	10	9.8	9	8	7.8	8	6.6	6.4	6.4	6.6	6.4	6	5.6	6	6	100
105	9.8	9.6	8.8	7.8	7.6	7.8	6.6	6.2	6.4	6.4	6	5.8	5.6	6	6	105
110	9.6	9.4	8.6	7.8	7.6	7.8	6.4	6.2	6.4	6.2	6	5.6	5.6	5.8	5.8	110
115	9.4	9.4	8.6	7.6	7.4	7.8	6.2	6	6.2	6	5.8	5.4	5.4	5.4	5.6	115
120	9.4	9.2	8.4	7.4	7.4	7.8	6.2	6	6.2	5.8	5.6	5.4	5	5.2	5.2	120
125	9.2	9	8.4	7.4	7.4	7.8	6	6	6.2	5.6	5.4	5.4	4.8	4.8	5	125
130	9.2	8.8	8.2	7.2	7.4	7.4	6	5.8	6.2	5.4	5.2	5.2	4.4	4.6	4.6	130
135	9	8.6	8	7.2	7.4	7.2	5.8	5.8	6.2	5.2	5	5	4.2	4.2	4.4	135
140	8.6	8.2	8	7.2	7	7	5.8	5.8	6	5	4.8	5	4	4	4.2	140
145	8.4	8	7.8	7	6.8	6.6	5.8	5.8	5.8	4.8	4.6	4.8	3.6	3.8	4	145
150	8	7.8	7.6	6.8	6.6	6.4	5.6	5.6	5.6	4.4	4.6	4.6	3.4	3.6	3.6	150
155	7.8	7.6	7.4	6.6	6.4	6.2	5.4	5.4	5.2	4.2	4.2	4.4	3.2	3.4	3.4	155
160	7.6	7.4	7.2	6.2	6.2	6	5.2	5	5	4	4	4.2	3	3.2	3.2	160
165	7.2	7	7	6	5.8	5.8	5	4.8	4.8	3.8	3.8	4	2.8	3	3	165
170	7	6.8	6.8	5.8	5.6	5.6	4.8	4.6	4.6	3.6	3.6	3.8	2.6	2.8	2.8	170
175	6.6	6.6	6.8	5.6	5.6	5.6	4.6	4.4	4.6	3.4	3.4	3.6	2.4	2.6	2.6	175
180	6.4	6.4		5.4	5.4	5.4	4.4	4.4	4.4	3.2	3.4	3.4		2.4	2.6	180
185		6.2		5.2	5.2	5.2	4.2	4.2	4.2	3	3.2	3.2			2.4	185
190		5.8		5	5	5	4	4	4	2.8	3	3			2.2	190
195				4.8	4.8		3.8	3.8	3.8	2.6	2.8	2.8				195
200				4.6	4.6		3.6	3.6	3.8	2.4	2.6	2.6				200
205							3.6	3.6		2.2	2.4	2.6				205
210							3.4	3.4			2.2	2.4				210
215							3.2	3.2			2	2.2				215
220								3				2				220

BURT crane & rigging



175 t

Krupp KMK 5175 (#109)

All Terrain Crane

					85
161 ft	76-141 ft	26'10" x 28'2"	99,200 lbs	360°	85%

ft	0°	76 15°	30°	0°	92 15°	30°	0°	108 15°	30°	0°	125 15°	30°	0°	141 15°	30°	ft
25	11.4															25
30	11.4			9.8			8									30
35	11.4			9.8			8									35
40	11.4			9.8			8			6			4.6			40
45	11.4			9.8			8			6			4.6			45
50	11.4	11.4		9.8			8			6			4.6			50
55	11.4	10.8		9.8	9		8	8.4		6			4.6			55
60	11.4	10.4		9.8	8.6		8	8.2		6	6		4.6	4.8		60
65	11.2	10		9.4	8.2		8	7.8		6	6		4.6	4.8		65
70	10.6	9.6	9.2	8.8	8	7.6	8	7.6		6	6		4.6	4.8		70
75	10.2	9.2	9	8.4	7.6	7.4	8	7.2		5.8	6		4.6	4.8		75
80	9.8	9	8.8	8	7.4	7.2	7.6	7	6.8	5.8	6	6	4.6	4.8	5	80
85	9.4	8.8	8.6	7.8	7.2	7	7.4	6.8	6.6	5.6	6	6	4.6	4.8	5	85
90	9	8.4	8.4	7.6	7	7	7.2	6.6	6.4	5.6	6	6	4.6	4.8	5	90
95	8.8	8.2	8.2	7.2	6.8	6.8	6.8	6.4	6.4	5.6	5.8	5.8	4.6	4.8	5	95
100	8.6	8.2	8.2	7	6.6	6.6	6.6	6.2	6.2	5.4	5.6	5.8	4.6	4.8	5	100
105	8.2	8	8	6.8	6.6	6.6	6.4	6.2	6	5.4	5.4	5.6	4.6	4.8	5	105
110	8	7.8	8	6.6	6.4	6.6	6.2	6	6	5.2	5.4	5.4	4.6	4.8	5	110
115	8	7.8	8	6.6	6.4	6.4	6.2	5.8	5.8	5	5.4	5.4	4.6	4.8	5	115
120	7.8	7.6	8	6.4	6.2	6.4	6	5.8	5.8	5	5	5.4	4.6	4.8	5	120
125	7.6	7.6	8	6.2	6.2	6.4	5.8	5.6	5.8	4.8	5	5	4.6	4.8	5	125
130	7.6	7.6	8	6.2	6	6.4	5.8	5.6	5.6	4.8	5	5	4.6	4.8	5	130
135	7.4	7.4	8	6	6	6.4	5.6	5.6	5.6	4.8	4.8	4.8	4.6	4.6	4.6	135
140	7.4	7.4	8	6	6	6.4	5.6	5.4	5.6	4.6	4.8	4.8	4.4	4.4	4.4	140
145	7.4	7.4	8	6	6	6.4	5.4	5.4	5.6	4.6	4.6	4.8	4.2	4.2	4.2	145
150	7.4	7.4	8	6	6	6.4	5.4	5.4	5.6	4.4	4.6	4.6	3.8	4	4	150
155	7.4	7.4	7.8	5.8	6	6.4	5.4	5.4	5.6	4.4	4.4	4.6	3.6	3.8	3.8	155
160	7.4	7.4	7.8	5.8	6	6.4	5.2	5.2	5.6	4.4	4.4	4.6	3.4	3.6	3.6	160
165	7.4	7.4	7.6	5.8	6	6.4	5.2	5.2	5.4	4.4	4.4	4.4	3.2	3.4	3.4	165
170	7.4	7.4	7.4	5.8	6	6.2	5.2	5.2	5.2	4	4.2	4.2	3	3	3.2	170
175	6.8	7.4	7.2	5.8	6	6	5.2	5	5	3.8	4	4	2.8	2.8	3	175
180	6	6.8	7.2	5.8	6	5.8	5	4.8	4.8	3.6	3.6	3.8	2.6	2.6	2.8	180
185	5.4	6.2	6.6	5.6	5.8	5.8	4.8	4.8	4.8	3.4	3.4	3.6	2.4	2.4	2.6	185
190	4.8	5.4	6	5	5.6	5.6	4.6	4.6	4.6	3.2	3.2	3.4	2.2	2.2	2.4	190
195	4.2	4.8	5.2	4.4	5.2	5.4	4.4	4.4	4.4	3	3	3.2				195
200	3.6	4.2	4.4	3.8	4.4	5	3.8	4.2	4.2	2.8	3	3				200
205	3	3.6		3.2	3.8	4.2	3.2	4	4.2	2.6	2.8	2.8				205
210	2.6	3		2.8	3.2	3.6	2.6	3.4	3.8	2.4	2.6	2.6				210
215	2	2.4		2.2	2.8	3	2.2	2.8	3.2	2.2	2.4	2.6				215
220					2.2			2.4	2.6		2.2	2.4				220
225									2.2							225



This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal gray lines across its entire width, providing a guide for handwriting or typing. The paper itself is a clean, off-white color.